

# **FnIO G – Series :**

## ***GT-5444***

***GT-5444 (4Channels, PWM Output, 0.5A/24Vdc, Push-pull)***

Table of Contents

[Table of Contents.....2](#)

[History.....3](#)

[1.ENVIRONMENT SPECIFICATION.....4](#)

[2.GT-5444 \(4Channels, PWM Output, 0.5A/24Vdc, Push-pull\).....5](#)

[2.1.GT-5444 Specification.....5](#)

[2.2.GT-5444 Wiring Diagram.....6](#)

[2.3.GT-5444 LED Indicator.....7](#)

[2.3.1.LED Indicator.....7](#)

[2.3.2.Channel Status LED.....7](#)

[2.4.Mapping data into the image table.....8](#)

[2.5.Parameter Data.....8](#)

History

Rev	Pages	Remarks	Date	Editor
1.00			2019/10/14	Soyeong, Park
1.01		Specification Release	2020/04/21	Soyeong, Park
1.02	4,6	Edit Certification / Change Diagram	2023/08/07	Soyeong, Park
1.03	5	Edit System Power Dissipation	2025/05/30	Suna, Hwang
1.04	8	Add Recovery Function	2025/08/08	Soyeong, Park

## 1. ENVIRONMENT SPECIFICATION


Environmental Specification	
Operation Temperature	-40°C ~60°C
UL Temperature	-20°C ~60°C
Storage Temperature	-40°C ~85°C
Relative Humidity	5%~90% Non-condensing
Mounting	DIN rail
General Specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6, 4g
Industrial Emissions	EN61000-6-4/All : 2011
Industrial Immunity	EN 61000-6-2 : 2005
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL

## 2. GT-5444 (4Channels, PWM Output, 0.5A/24Vdc, Push-pull)

### 2.1. GT-5444 Specification

Items	Specification
<b>Output Specification</b>	
Number of channel	4 Channels
Number of output	4 Output, Push-pull Type
Indicators	4 Green Pulse Output LED
Output Voltage	Nominal 24Vdc (Depends on Field Power)
Output current	0.5A per channel, 2.0A per Module *automatically switch current (sink/source) according to external load.  *Operating Temperature -40°C~45°C : Max. 0.5A per channel 45°C~60°C : Max. 0.3A per channel
Pulse output frequency	1-5kHz±0.5%
Pulse output duty	0.0-100.0% ±1.0% (0.1%/1LSB), Ton>1us, Toff>1us
Protection	Short Protection
Common Type	4 Common, Field Power 0V is Common
<b>General specification</b>	
Power dissipation	Max. 80mA @ 5.0Vdc
Isolation	I/O to Logic : Photocoupler Isolation Field Power : Non-Isolation
UL Field Power	Supply voltage : 24Vdc nominal, Class 2
Field Power	Supply voltage : 24Vdc nominal Voltage range : 15~30Vdc Power dissipation : Max. 15mA @ 24Vdc except load.
Single Wire	I/O Cable Max. 0.823mm <sup>2</sup> (AWG18)
Weight	63g
Module Size	12mm x 109mm x 70mm
<b>Environment Condition</b>	<b>Refer to 'Environment Specification'</b>

## 2.2. GT-5444 Wiring Diagram

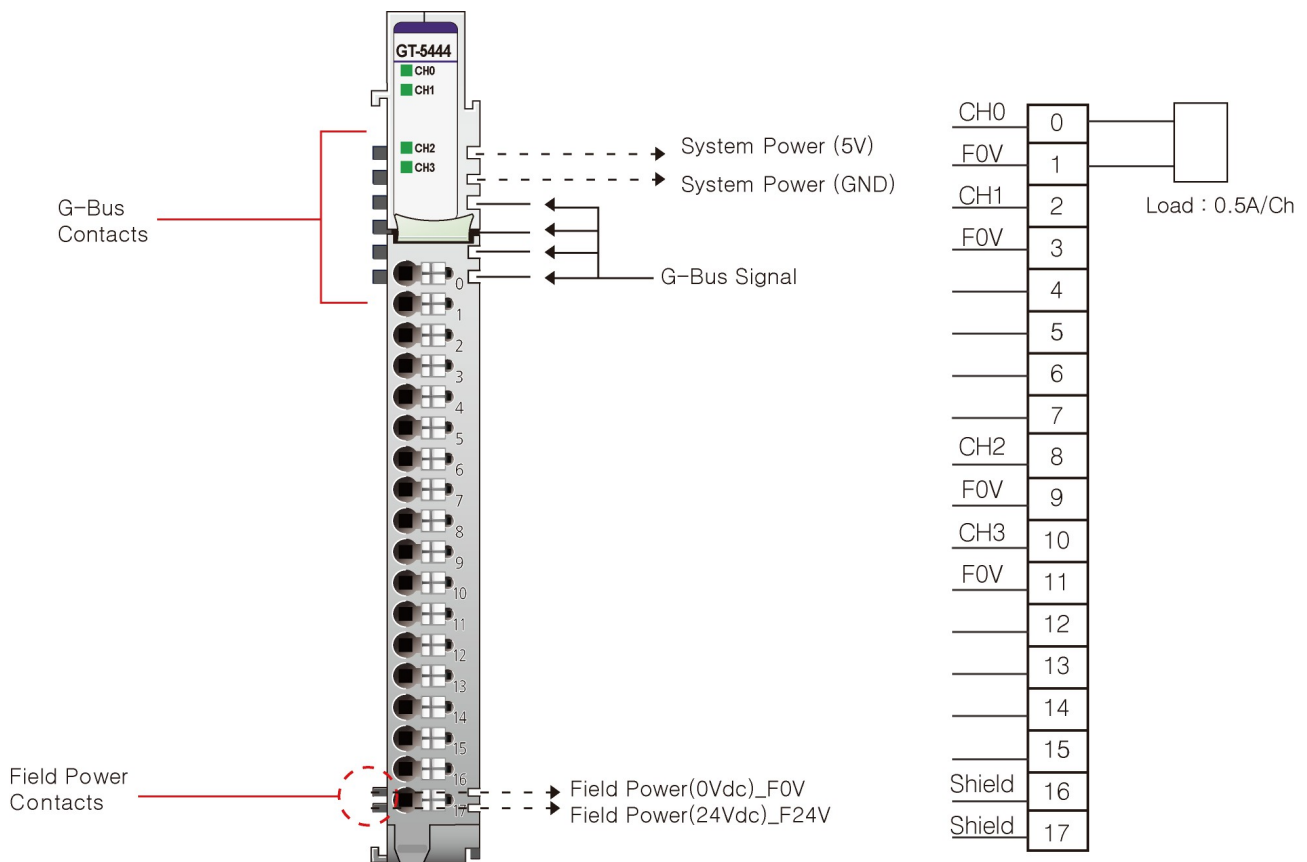


\*automatically switch current (sink/source) according to external load.

Pin No.	Signal Description
0	PWM Output Channel #0
1	Field Power 0V, Common
2	PWM Output Channel #1
3	Field Power 0V, Common
4	N.C.
5	N.C.
6	N.C.
7	N.C.
8	PWM Output Channel #2
9	Field Power 0V, Common
10	PWM Output Channel #3
11	Field Power 0V, Common
12	N.C.
13	N.C.
14	N.C.
15	N.C.
16	Shield
17	Shield

\*N.C : Not Connected.

### 2.3. GT-5444 LED Indicator

#### 2.3.1. LED Indicator

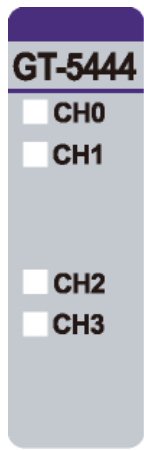

LED No.	LED Function / Description	LED Color
0	PWM Output Channel #0	Green
1	PWM Output Channel #1	Green
2	PWM Output Channel #2	Green
3	PWM Output Channel #3	Green

#### 2.3.2. Channel Status LED

Status	LED	To indicate
No Signal	Off	No Output Signal
On Signal	Green	Output Signal detected

## 2.4. Mapping data into the image table

### ● Input Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Reserved							
Byte1	Reserved							
Byte2	Reserved							
Byte3	Reserved							

### ● Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Frequency CH#0 Low Byte							
Byte1	Frequency CH#0 High Byte							
Byte2	Duty CH#0 Low Byte							
Byte3	Duty CH#0 High Byte							
Byte4	Frequency CH#1 Low Byte							
Byte5	Frequency CH#1 High Byte							
Byte6	Duty CH#1 Low Byte							
Byte7	Duty CH#1 High Byte							
Byte8	Frequency CH#2 Low Byte							
Byte9	Frequency CH#2 High Byte							
Byte10	Duty CH#2 Low Byte							
Byte11	Duty CH#2 High Byte							
Byte12	Frequency CH#3 Low Byte							
Byte13	Frequency CH#3 High Byte							
Byte14	Duty CH#3 Low Byte							
Byte15	Duty CH#3 High Byte							

- Range of each Duty is 0(0.0%) ~ 1000(100.0%). If Duty value is 365, then duty rate is 36.5%

- When a fault occurs, all outputs are turned OFF.

- After Error recovery, recovery operation is performed according to the parameter values, Refer to Error-Recovery in Parameter Data.

## 2.5. Parameter Data

- Valid Parameter length : 2 Bytes

- Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Reserved							Error-Recovery*
Byte1	Reserved							

\* Error-Recovery : 0(default) = Auto-Recovery / 1 = Manual-Recovery

- Auto-Recovery : When the error situation is restored to normal, it operates with the value before the error.

- Manual-Recovery : When the error situation is restored to normal, the output image data value must be reset.