
FnIO G – Series :

GT-3424

GT-3424 (4 Channels, Voltage Input, 0~10Vdc / 0~5Vdc / 1~5Vdc, 12bit)

Table of Contents

[Table of Contents.....2](#)

[History.....3](#)

[1.ENVIRONMENT SPECIFICATION.....4](#)

[2.GT-3424 \(4 Channels Voltage Input, 0~10Vdc / 0~5Vdc / 1~5Vdc, 12bit\).....5](#)

[2.1.GT-3424 Specification.....5](#)

[2.2.GT-3424 Wiring Diagram.....6](#)

[2.3.GT-3424 LED Indicator.....7](#)

[2.3.1.LED Indicator.....7](#)

[2.3.2.Channel Status LED.....7](#)

[2.4.Data Value / Voltage.....8](#)

[2.4.1.Operating Range.....8](#)

[2.4.2.Underrun / Overrun Range.....9](#)

[2.5.Mapping data into the image table.....10](#)

[2.6.Parameter Data.....10](#)

Specification

History

Rev	Pages	Remarks	Date	Editor
1.00			2017/07/28	Seokhyun, Jun
1.01		Edit conversion time	2020/04/17	Seokhyun, Jun
1.02	4,6,8	Change Diagram/Edit Certification, Signal Desctiprion/Add Data Range	2023/09/05	Soyeong, Park
1.03	5	Edit System, Field Power Dissipation	2025/05/30	Suna, Hwang

Specification

1. ENVIRONMENT SPECIFICATION

Environmental specification	
Operating Temperature	-40°C ~60°C
UL Temperature	-20°C ~60°C
Storage Temperature	-40°C ~85°C
Relative Humidity	5% ~ 90% non-condensing
Mounting	DIN rail
General specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6, 4g
Industrial Emissions	EN61000-6-4/All : 2011
Industrial Immunity	EN 61000-6-2 : 2005
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL


Specification

2. GT-3424 (4 Channels Voltage Input, 0~10Vdc / 0~5Vdc / 1~5Vdc, 12bit)

2.1. GT-3424 Specification

Items	Specification
Input Specification	
Inputs per module	4 Channels single ended, non-isolated between channel
Indicators(Logic side)	4 Green Input status
Resolution in Ranges	12 bits : 2.44mV/Bit(0~10V) 12 bits : 1.22mV/Bit(0~5V) 12 bits : 0.977mV/Bit(1~5V)
Input Current Range	0~10Vdc, 0~5Vdc, 1~5Vdc
Data Format	16bits Integer (2's complement)
Module Error	±0.1% Full Scale @ 25°C ±0.3% Full Scale @ -40°C, 60°C
Input Impedance	500kΩ
Diagnostic	Diagnostic Field Power Off : LED Blinking Field Power On : LED Off < 0.5% (Maximum Input Value) Field Power On : LED On > 0.5% (Maximum Input Value)
Conversion Time	0.4msec / All channel
Calibration	Not Required
Common Type	4 Common, Field Power 0V is Common(AGND)
General specification	
Power dissipation	Max. 30mA @ 5Vdc
Isolation	I/O to Logic : Isolation Field power : Non-Isolation
UL Field Power	Supply Voltage : 24Vdc nominal, Class 2
Field Power	Supply Voltage : 24Vdc nominal Voltage Range : 18 ~ 30Vdc Power Dissipation : Max. 30mA @ 24Vdc
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)
Torque	0.8Nm(7lb-in)
Weight	58g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to 'Environment Specification'


2.2. GT-3424 Wiring Diagram

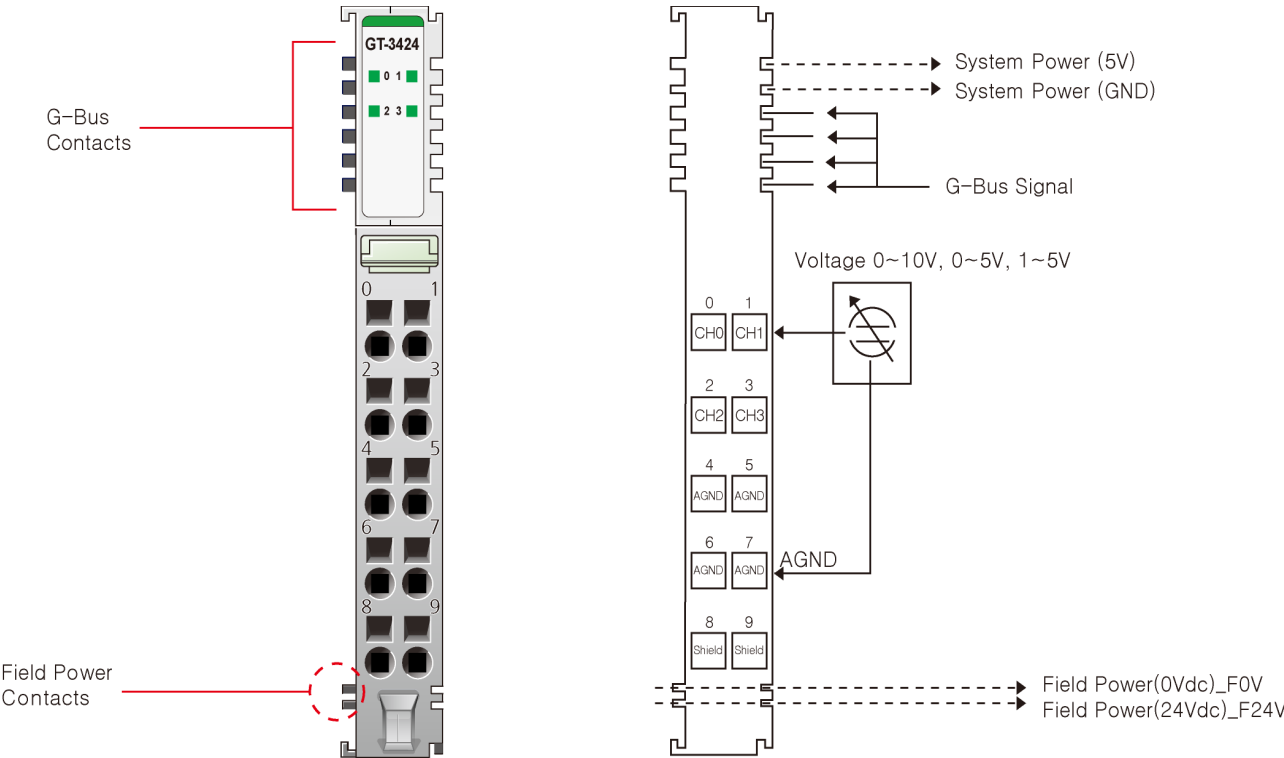

Pin No.	Signal Description	Signal Description	Pin No.
0	Input Channel 0	Input Channel 1	1
2	Input Channel 2	Input Channel 3	3
4	Input Channel Common(AGND)	Input Channel Common(AGND)	5
6	Input Channel Common(AGND)	Input Channel Common(AGND)	7
8	Shield	Shield	9

2.3. GT-3424 LED Indicator

2.3.1. LED Indicator

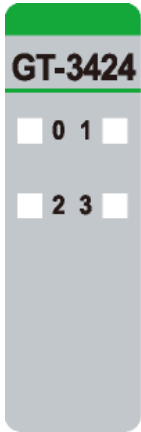

LED No.	LED Function / Description	LED Color
0	INPUT Channel 0	Green
1	INPUT Channel 1	Green
2	INPUT Channel 2	Green
3	INPUT Channel 3	Green

2.3.2. Channel Status LED


Status	LED	To indicate
Normal Operation	Off	< 0.5% (Maximum Input Value)
	Green	> 0.5% (Maximum Input Value)
Field Power Error	All Channel Repeat the Green and OFF	Field Power is unconnected

2.4. Data Value / Voltage

2.4.1. Operating Range


Voltage Range : 0~10V

Voltage	0.0V	2.5V	5.0V	10.0V
Data(Hex)	H0000	H03FF	H07FF	H0FFF

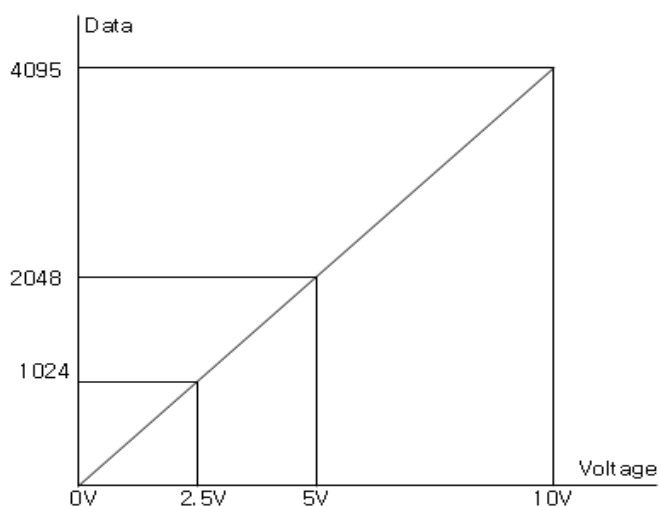

Voltage Range : 0~5V


Voltage	0.0V	1.25V	2.5V	5.0V
Data(Hex)	H0000	H03FF	H07FF	H0FFF

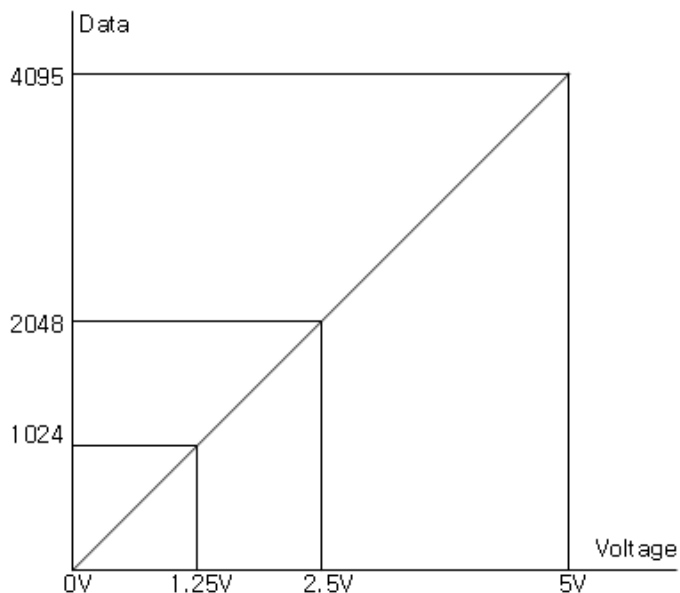

Specification

Voltage Range : 1~5Vdc

Voltage	1.0V	2.0V	3.0V	5.0V
Data(Hex)	H0000	H03FF	H07FF	H0FFF

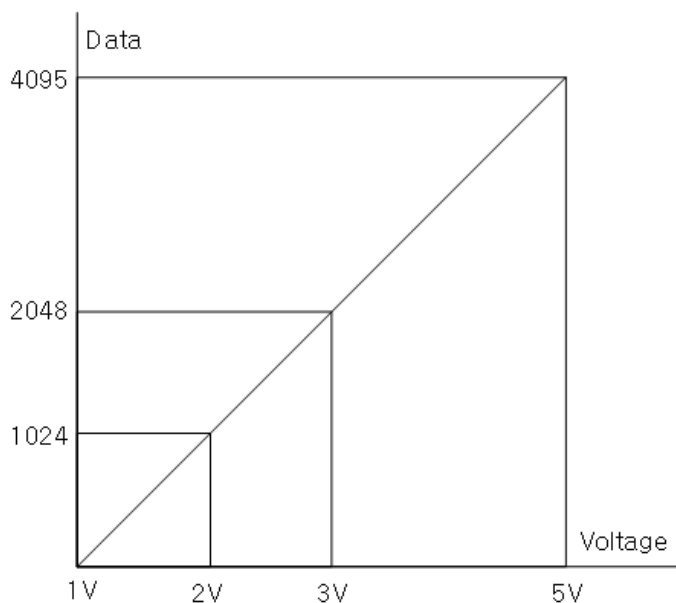

2.4.2. Underrun / Overrun Range


Voltage	Voltage Range : 0~10V		Voltage Range : 0~5V		Voltage Range : 1~5V	
	<0.0V	>10.0V	<0.0V	>6.0V	<1.0V	>6.0V
Data(Hex)	-	-	-	H7FFF	H8000	H7FFF

Specification

2.5. Mapping data into the image table

- Input Module Data

Analog Input Ch0
Analog Input Ch1
Analog Input Ch2
Analog Input Ch3



- Input Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Analog Input Ch0 Low byte							
Byte1	Analog Input Ch0 High byte							
Byte2	Analog Input Ch1 Low byte							
Byte3	Analog Input Ch1 High byte							
Byte4	Analog Input Ch2 Low byte							
Byte5	Analog Input Ch2 High byte							
Byte6	Analog Input Ch3 Low byte							
Byte7	Analog Input Ch3 High byte							

2.6. Parameter Data

- Valid Parameter length: 6 Bytes
- Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Voltage Range for Channel 0 (H00: 0~10Vdc, H01: 0~5Vdc, H02: 1~5Vdc)							
Byte1	Voltage Range for Channel 1 (H00: 0~10Vdc, H01: 0~5Vdc, H02: 1~5Vdc)							
Byte2	Voltage Range for Channel 2 (H00: 0~10Vdc, H01: 0~5Vdc, H02: 1~5Vdc)							
Byte3	Voltage Range for Channel 3 (H00: 0~10Vdc, H01: 0~5Vdc, H02: 1~5Vdc)							
Byte4	Filter Time (H00: Default Filter(20) / H01: Fastest ~ / H3E: Slowest)							
Byte5	Reserved							