
FnIO G – Series :

GT-2768

GT-2768(8 Points, Relay Output Terminal, 24Vdc/ac, 2A)

Specification

Table of Contents

[Table of Contents.....2](#)

[History.....3](#)

[1.ENVIRONMENT SPECIFICATION.....4](#)

[2.GT-2768 \(8 Points, Relay Output Terminal, 24Vdc/ac, 2A\).....5](#)

[2.1.GT-2768 Specification.....5](#)

[2.2.GT-2768 Wiring Diagram.....6](#)

[2.3.GT-2768 LED Indicator.....7](#)

[2.3.1.LED Indicator.....7](#)

[2.3.2.Channel Status LED.....7](#)

[2.4.Mapping Data into the Image Table.....8](#)

[2.5.Parameter Data.....9](#)

Specification

History

Rev	Pages	Remarks	Date	Editor
1.00			2019/05/21	Seokhyun, Jun
1.01	5	Specification Revision	2020/03/13	Soyeong, Park
1.02	4,5	Shock, Vibration specification changed General specification added(UL)	2020/04/20	Juyong, Bae
1.03	6	Change Diagram	2023/04/03	Soyeong, Park
1.04	6,7	Change Diagram, Status LED	2023/08/08	Suna, Hwang

Specification

1. ENVIRONMENT SPECIFICATION

Environmental specification	
Operating Temperature	-40°C ~60°C
UL Temperature	-20°C ~60°C
Storage Temperature	-40°C ~85°C
Relative Humidity	5% ~ 90% non-condensing
Mounting	DIN rail
General specification	
Shock Operating	IEC 60068-2-27 : 2008/15g, 11ms
Vibration Resistance	Based on IEC 60068-2-6, 4g
Industrial Emissions	EN61000-6-4/All : 2011
Industrial Immunity	EN 61000-6-2 : 2005
Installation Position	Vertical and horizontal installation is available.
Product Certifications	CE, UL


Specification

2. GT-2768 (8 Points, Relay Output Terminal, 24Vdc/ac, 2A)

2.1. GT-2768 Specification

Items	Specification
Output specification	
Output per module	8 points, bi-directional
Indicators	8 green output state
Relay type	MOS Relay (solid state relay)
Output voltage range (load dependent)	24Vac @ 2A resistive 24Vdc @ 2A resistive Max. AC/DC : 24V
Output delay time (resistive load)	OFF to ON : Max. 0.5 ms @ 24Vdc ON to OFF : Max. 3 ms @ 24Vdc OFF to ON : Max. 0.5 ms @ 24Vac ON to OFF : Max. 3 ms @ 24Vac
Output current rating	Max. 2A per channel Operating temperature -40°C~60°C : Max. 1.5A per channel -40°C~50°C : Max. 2A per channel
Frequency range (Vac)	47 ~ 63Hz
Open-state leakage current	Max. 0.1uA
Common type	8 points / 2 COM
General specification	
Power dissipation	Max. 130mA @ 5Vdc
Isolation	I/O to Logic : photocoupler isolation
UL field power	Supply voltage : 24Vdc nominal, Class 2
Field power	Supply voltage : 24Vdc nominal Voltage range : 15V~30Vdc (AC Power Not used)
Wiring	I/O Cable Max. 0.823mm ² (AWG 18)
Weight	63g
Module size	12mm x 109mm x 70mm
Environment condition	Refer to 'Environment Specification'


2.2. GT-2768 Wiring Diagram

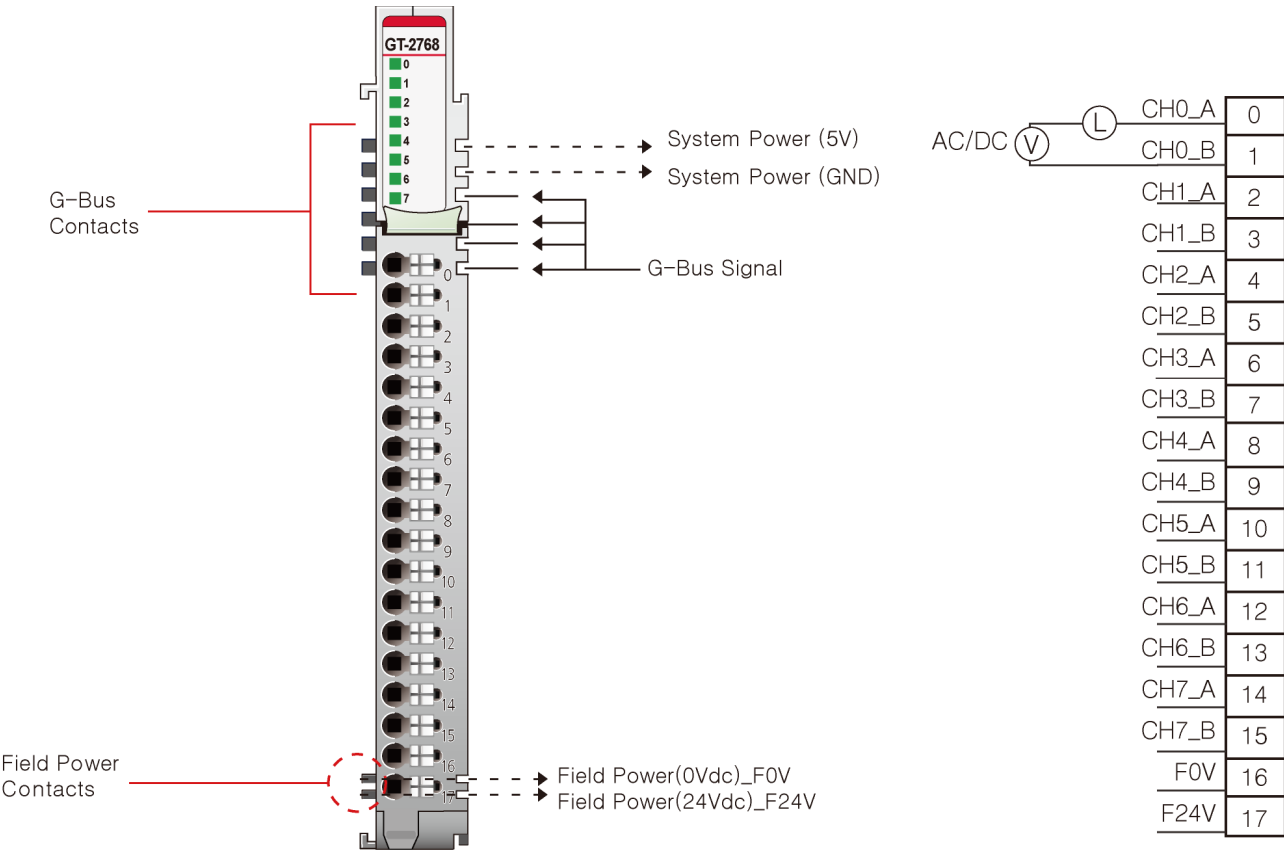

Pin No.	Signal Description
0	Output Channel 0 A
1	Output Channel 0 B
2	Output Channel 1 A
3	Output Channel 1 B
4	Output Channel 2 A
5	Output Channel 2 B
6	Output Channel 3 A
7	Output Channel 3 B
8	Output Channel 4 A
9	Output Channel 4 B
10	Output Channel 5 A
11	Output Channel 5 B
12	Output Channel 6 A
13	Output Channel 6 B
14	Output Channel 7 A
15	Output Channel 7 B
16	Field Power 0V
17	Field Power 24V

2.3. GT-2768 LED Indicator

2.3.1. LED Indicator

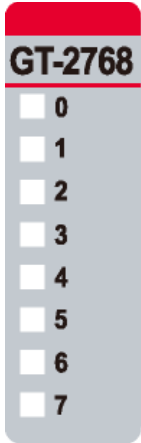

LED No.	LED Function / Description	LED Color
0	OUTPUT Channel 0	Green
1	OUTPUT Channel 1	Green
2	OUTPUT Channel 2	Green
3	OUTPUT Channel 3	Green
4	OUTPUT Channel 4	Green
5	OUTPUT Channel 5	Green
6	OUTPUT Channel 6	Green
7	OUTPUT Channel 7	Green


2.3.2. Channel Status LED

Status	LED	To indicate
No Signal	Off	No Output Signal
On Signal	Green	Output Signal detected

2.4. Mapping Data into the Image Table

● Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	D7	D6	D5	D4	D3	D2	D1	D0



● Output Module Data

D7	D6	D5	D4	D3	D2	D1	D0
----	----	----	----	----	----	----	----

2.5. Parameter Data

- Valid Parameter length : 2Byte
- Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Fault Action (ch0~ch7) 0: Fault value, 1: Hold last state							
Byte1	Fault value(ch0~ch7) 0: Off, 1: On							